


Replace acetylene, propane and other fuel gases with G-TEC

TB-60 / TB-125 Torch Boosters

**Boost standard utility natural gas service as high as 25 psi
for almost any flame torch application!**

**Whatever Your Torch
Get Superior Performance
With High-Pressure Natural Gas!**

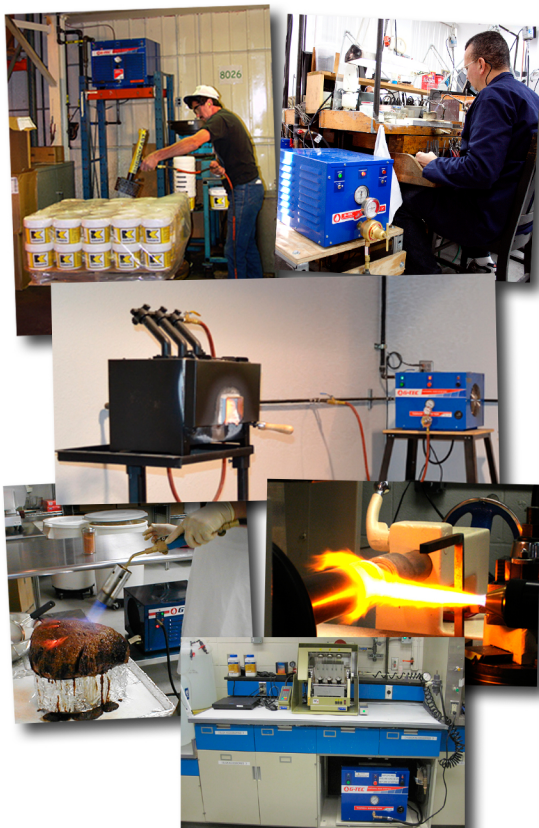

TB-60 / TB-125 Torch Boosters replace acetylene, propane and other fuel gases in cylinders and provide a steady supply of 25 psi natural gas directly from your standard utility gas line.

Cut fuel gas costs by up to 80%
Never run out of gas in the middle of a job
Don't waste time changing cylinders
Get superior torch performance
Eliminate stored gas tanks - make your workplace safer

Connect your Torch Booster to a single torch, shop manifold or automated equipment. Once started Torch Boosters supply all the gas you need all day and automatically adjust as torches are turned on and off without operator attention. Turn it on for first shift and off at the end of the day. TB-60 Torch Booster supplies high-pressure natural gas at 60 cf/hr; TB-125 Torch Booster supplies 125 cf/hr. A single stage regulator can be installed on your Torch Booster to set pressure from 1 to 25 psi.

Typical applications for the TB-60 Torch Booster include fueling 1 or 2 common flame cutting or brazing torches, an NC Tool Forge with 1 or 2 burners, a single Messer ALFA torch or a single ham glazing torch. Typical applications for the TB-125 Torch Booster include fueling up to 4 common flame cutting or brazing torches, up to 2 Messer ALFA torches, an NC Tool Forge with up to 4 burners, XRF sample preparation, one Shrinkfast Model 975 or Model 998 Heat Tool or 2 ham glazing torches.

Certified by CSA International and welcomed everywhere in North America, even buildings where cylinders of acetylene and propane are prohibited. G-TEC Torch Boosters are compact, quiet, do not require ventilation or other site preparation and are normally installed right in the area where high pressure natural gas will be used.

Dimensions & Weight

Width - 20", Height - 16", Depth - 18"
Weight - TB-60 90 LB / TB-125 125 LB

Electric Power

TB-60 / TB-125 Systems operate on either 115V 60Hz
or 230V single phase 50 Hz power

Gas Supply Line

Use 3/4" (TB-60) or 1" (TB-125) steel pipe to supply
1/4 - 5 psi natural gas to these Torch Boosters.
Flexible 5' hose and shutoff valve are included

Environmental Requirements

Ambient temperature should be between
40-90F/ 0-32C



800-451-8294
www.gas-tec.com / info@gas-tec.com

