

Replace acetylene, propane and other fuel gases with G-TEC


TB-30 Torch Boosters

**Boost standard utility natural gas service as high as 25 psi
for cutting steel, brazing, heating - almost any flame torch application!**


**Get Superior Performance
With High-Pressure Natural Gas!**



Natural gas makes clean cuts with little slag, square corners and a smooth cut face

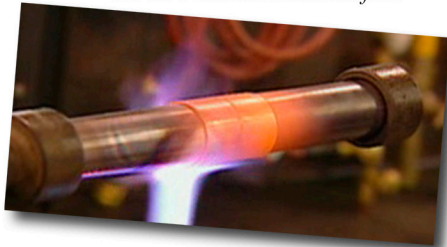

Brazers say a natural gas torch has better control and a more forgiving flame yet still provides plenty of heat

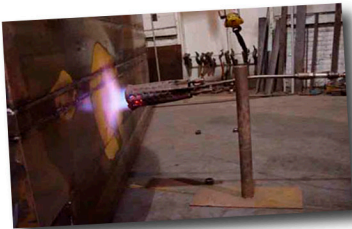

Natural gas can be used at any pressure and there are no valve icing problems when you heat with natural gas



TB-30 Torch Boosters replace acetylene, propane and other fuel gases in cylinders and provide a steady supply of 25 psi natural gas directly from your standard utility gas line.

Cut fuel gas costs by up to 80%
Never run out of gas in the middle of a job
Don't waste time changing empty cylinders
Get superior torch performance
Eliminate stored gas tanks - make your workplace safer

Connect your Torch Booster to a single torch, shop manifold or automated equipment. Once started Torch Boosters supply all the gas you need all day and automatically adjust as torches are turned on and off, without operator attention. Turn it on for first shift and off at the end of the day. TB-30 Torch Booster supplies high-pressure natural gas at 40 cf/hr and is the right choice for a single cutting or brazing torch. An external regulator can be attached to set pressure between 1-25 psi.

Cutting torches require only a change of torch tip, brazing torches require a natural gas mixer - keep the torch handle you already use.

Designed and manufactured to International Standards for performance, reliability and safety, G-TEC Torch Boosters are welcomed everywhere in North America, even buildings where cylinders of acetylene and propane are prohibited. They are compact, quiet, do not require ventilation or other site preparation and are normally installed right in the area where high pressure natural gas will be used.

Dimensions & Weight

Width - 12", Height - 12", Depth - 16"
Weight - TB-30 50 LB

Electric Power

TB-30 Systems operate on 110V
60Hz 15 amp electrical power

Gas Supply Line

Use 1/2" steel pipe to supply <1 LB natural gas to the Torch Booster. Flexible 5' hose and shutoff valve are included

Environmental Requirements

Ambient temperature should be between 40-90F



800-451-8294

www.gas-tec.com / info@gas-tec.com