



This document provides examples of the information the NYC Fire Department requires on the drawing submitted in support of a Site-Specific Certificate Of Approval.

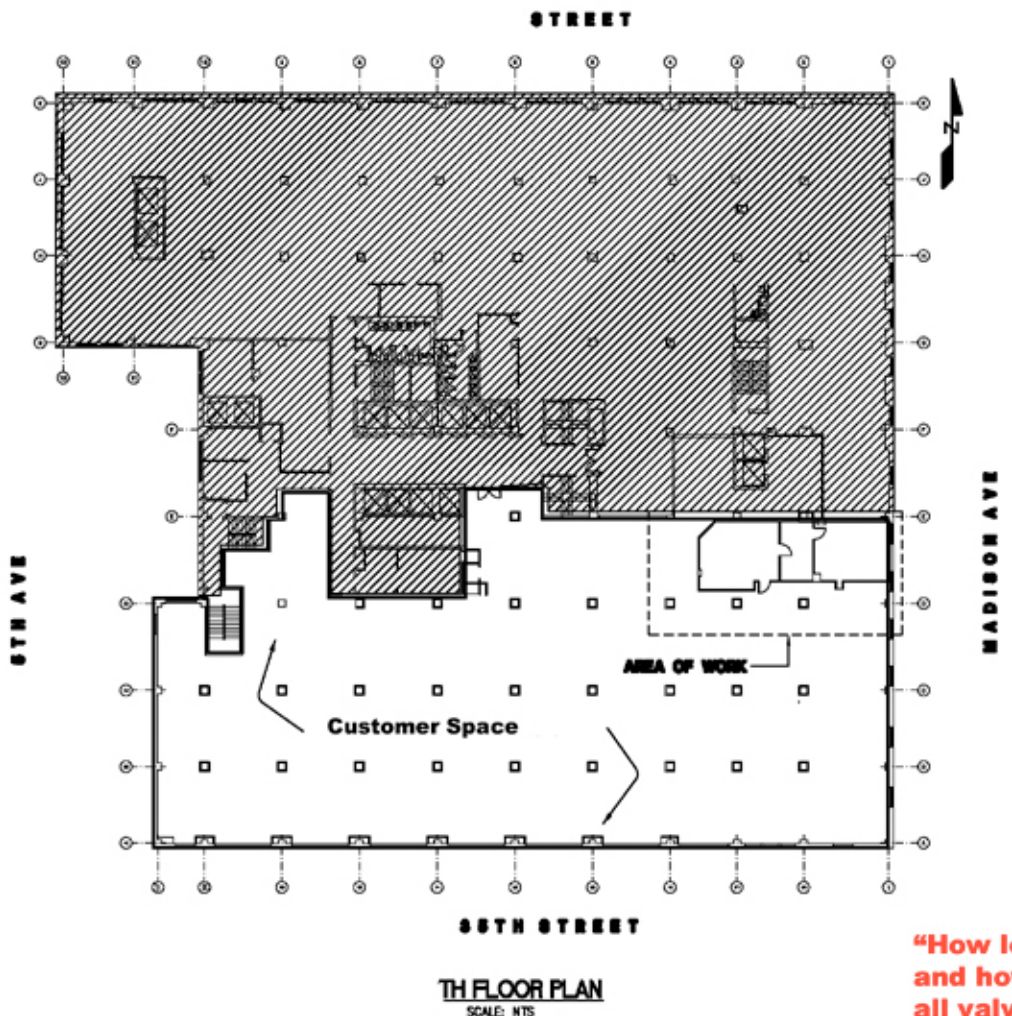

"The gas connection/piping of the Torch Booster"

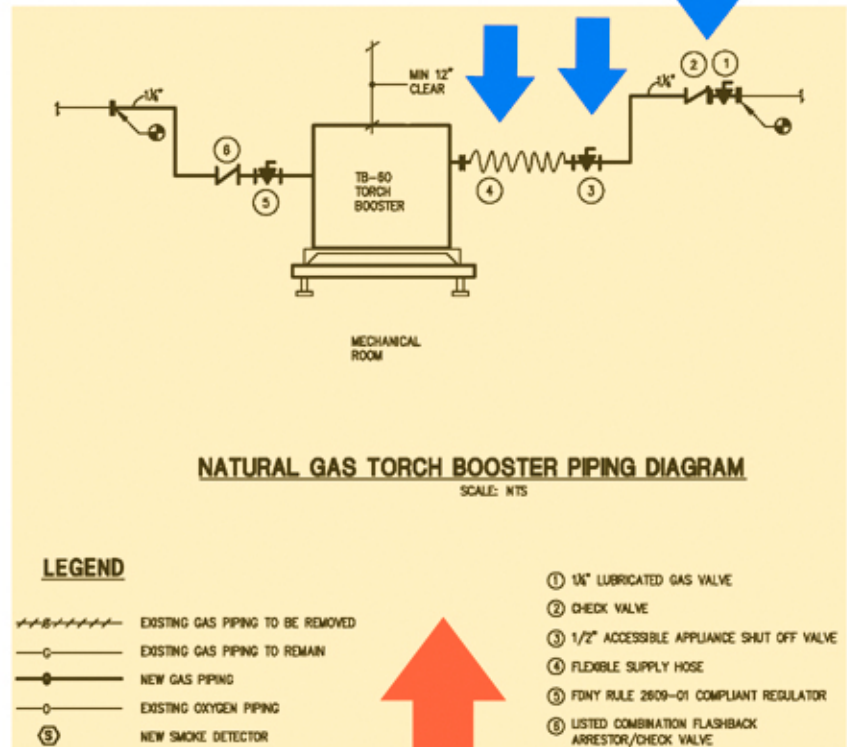

NOTES:

1/2" GAS DISCHARGE OUTLET PIPE FROM OWNER FURNISHED TB-80 NATURAL GAS TORCH BOOSTER TO "HOKE" TORCH. DISCHARGE OUTLET PIPE TO BE EQUIPPED WITH REGULATOR AND LISTED COMBINATION FLASHBACK ARRESTOR/CHECK VALVE.

THE GAS BOOSTER SHALL BE MOUNTED AND INSTALLED AS PER THE MANUFACTURER'S SPECIFICATIONS AND/OR DRAWING.

A CHECK VALVE SHALL BE INSTALLED BETWEEN THE GAS METER AND THE GAS BOOSTER. THE CHECK VALVE IS REQUIRED TO PREVENT FLOW BACK THROUGH THE GAS METER AND INTO THE GAS DISTRIBUTION SYSTEM.

ONLY CON-EDISON APPROVED CHECK VALVES AND MERCURY FREE LOW-PRESSURE SWITCHES SHALL BE INSTALLED.

SUPPLY OF GAS TO EQUIPMENT NOT REQUIRING "BOOSTED PRESSURE" SHALL BE LOCATED ON UPSTREAM SIDE OF THE CHECK VALVE. BRANCH SUPPLY MAY BE CONNECTED THROUGH THE SAME METER OR SEPARATED METER DEPENDING ON THE SERVICE CLASSIFICATION INVOLVED.

ALL PIPING SYSTEM SHALL BE IN ACCORDANCE WITH THE "NATIONAL FUEL GAS CODE" - ANSI Z223.1 (NFPA 58), NFPA 51, NEW YORK CITY BUILDING CODE, NEW YORK CITY FIRE CODE AND CON-EDISON SPECIFICATIONS.

PROVIDE FLASHBACK ARRESTOR ON OXYGEN SUPPLY LINE.


THE USE OF THE NATURAL GAS TORCH BOOSTER COMPLIES WITH APPLICABLE NFPA STANDARDS INCLUDING BUT NOT LIMITED TO NFPA 51 AND THE NYC BUILDING CODE, FIRE CODE, FIRE DEPT. RULE 2609-01 AND ELECTRICAL CODE.

CHECK - ALL CHECK VALVES CAN BE INSTALLED IN THE HORIZONTAL OR VERTICAL (WITH FLOW DOWNWARD) POSITION. THERE SHOULD BE AT LEAST TEN PIPE DIAMETER OF STRAIGHT PIPE UPSTREAM OF THE CHECK VALVE.


FLASHBACK ARRESTOR MAY BE INSTALLED EITHER ON THE MAIN SUPPLY LINE OR AT EACH INDIVIDUAL TORCH.

"This statement: 'The use of the natural gas torch booster complies with all applicable NFPA Standards including, but not limited to NFPA 51 and the New York City Building Code, Fire Code, Fire Dept. Rule 2609-01 and Electrical Code.'"

"How low pressure natural gas is supplied to the Torch Booster and how high-pressure gas is delivered to the torches, including all valves, check valves and other fittings required by NYC Codes, Rules and other Regulations."

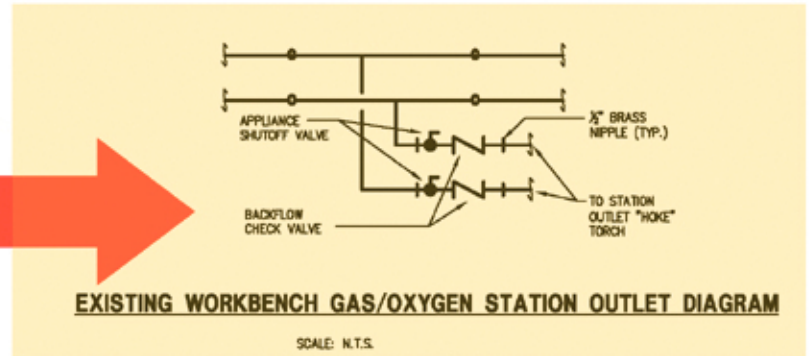

"The number and specification of the torches to be connected to the Torch Booster."

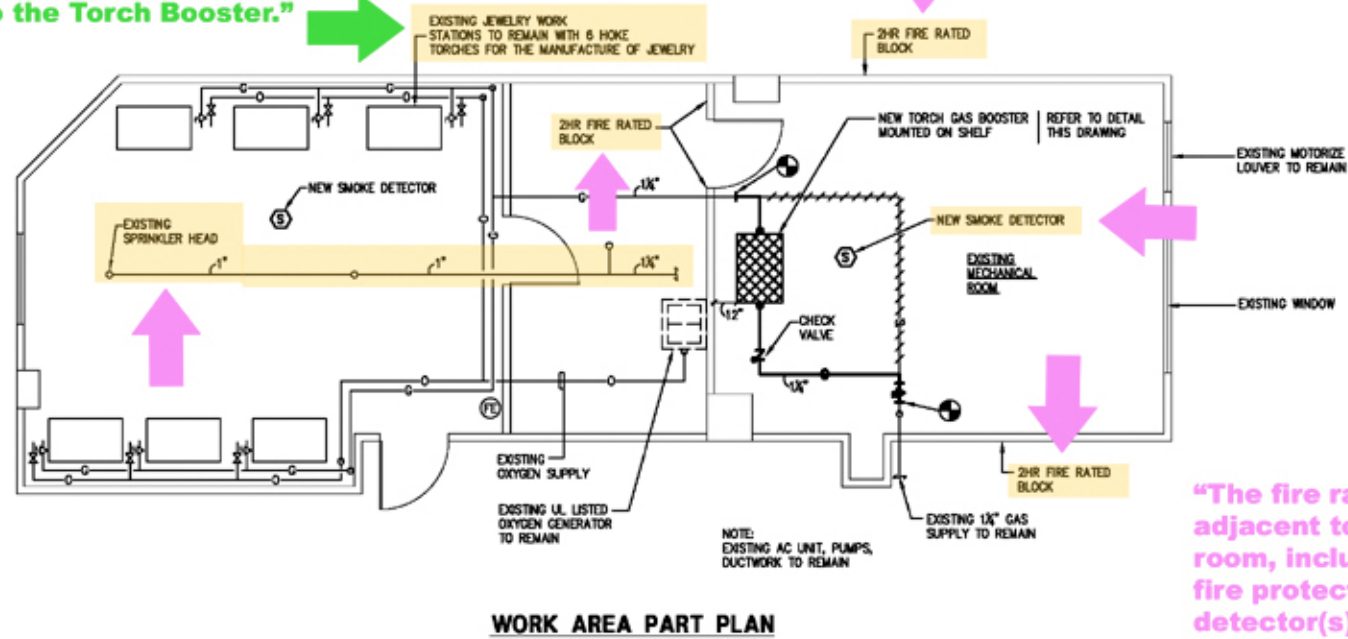

"The fire rating of the rooms that are situated directly adjacent to the designated natural gas Torch Booster room, including all applicable safety features such as fire protection system, mechanical ventilation, gas detector(s), or alarm system that is installed in the workshop."

PROPOSED NATURAL GAS BOOSTER P.M.P.

G-TEC TB-80 GAS BOOSTER  
25 PSI MAX. GAS PRESSURE AT 800F/HR  
ELECTRICAL POWER 110V, 15 AMP.  
GAS SUPPLY LINE - 1/2" SCHEDULE 40 PIPE  
MAXIMUM NUMBER OF TORCH CONNECTION - 6 STATIONS  
MOUNT MIN. 12" ABOVE FINISHED FLOOR WITH MINIMUM 12" CLEARANCE ALL AROUND FOR VENTILATION

FIELD DATA:

LOCATION: 200 MADISON AVENUE, NEW YORK, NY  
BLOCK: 863  
LOT: 14  
ZONE:

BUILDING CONSTRUCTION CLASSIFICATION - CLASS 1  
FIREPROOF (OLD CODE)  
BUILDING OCCUPANCY GROUP: COMMERCIAL  
BUILDING HAS SPRINKLER/STANDPIPE & INTERIOR ALARM SYSTEM

NOTE:

WORKSHOP IS SPRINKLERED ENTIRELY. HEATING BY HOT WATER BASEBOARD. TWO EXISTING AIR CONDITIONING UNITS SUPPLY TENANT SPACE ONLY.

REVISION	DATE

**PROJECT:**  
Location:  
Madison Avenue  
New York, New York

**TITLE:**  
GAS BOOSTER INSTALLATION  
JEWELRY WORKSHOP  
PLANS & DETAILS

DATE:	
PROJECT NO.:	
DRAWN BY:	
CHECK BY:	
DWG NO.:	P-301.00

THESE PLANS ARE APPROVED ONLY FOR THE WORK ON THE APPLICATION SPECIFICATION SHEET. ALL OTHER MATTERS SHOWN ARE NOT TO BE RELIED UPON OR TO BE CONSIDERED AS EITHER BEING APPROVED OR IN ACCORDANCE WITH APPLICABLE CODES.